

PERFORMANCE HAS A NAME.

More power, more productivity, more uptime, and more machine capability. All with less complexity, less weight and less servicing. The L9 Performance Series engine is tailored to your machine, responding precisely when you need it to and maximising productivity, even in the toughest conditions. When you can't afford to stop, we're Always On.

MORE PERFORMANCE

$$\left[\begin{array}{c} 8\% \\ \text{MORE POWER} \end{array} \right] + \left[\begin{array}{c} 14\% \\ \text{MORE TORQUE} \end{array} \right] = \text{MORE PRODUCTIVITY}$$

Compared to the previous model

MORE RELIABILITY

- Expert fault recommendations through Connected Diagnostics™
- Remote monitoring that extends engine life and reduces downtime

MORE EFFICIENCY

- Less fuel consumption and noise
- Up to an additional **25%** fuel economy improvement through Start-Stop option

MORE GLOBAL

- Common products across emissions levels and locations
- Certified to both EU Stage V and EPA Tier 4 Final emissions standards
- Can be configured to **5,000** ppm sulphur tolerance*

LESS COST OF OPERATION



Less To Maintain

Breather:
No maintenance required

+



1,000 Hour Maintenance Intervals Achievable

Fuel/Oil Filters:
Up to 1,000 hours change interval

=




More Uptime

Improves your bottom line

L9™

PERFORMANCE
S E R I E S

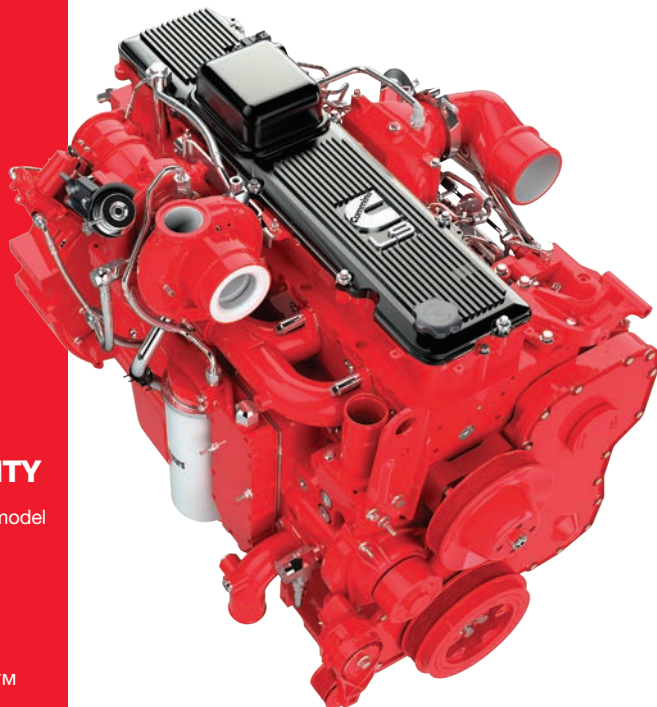

LESS COMPLEXITY

EGR FREE WITH SINGLE MODULE™ AFTERTREATMENT



DOC DPF Adblue/DEF Doser & Mixing SCR

UP TO 20% LIGHTER


UP TO 40% SMALLER



ALWAYS ON

MORE POWER

- 8% more power
- More machine capability with higher power density
- Exceptional reliability maintained with performance increases


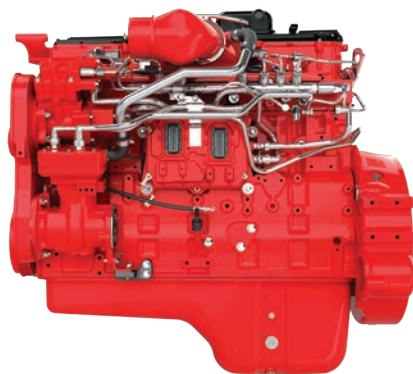


MORE TORQUE

- 14% higher peak torque
- Torque curve increases below rated speed support machine productivity improvements
- Stage V ratings optimised by application

L9TM

PERFORMANCE SERIES

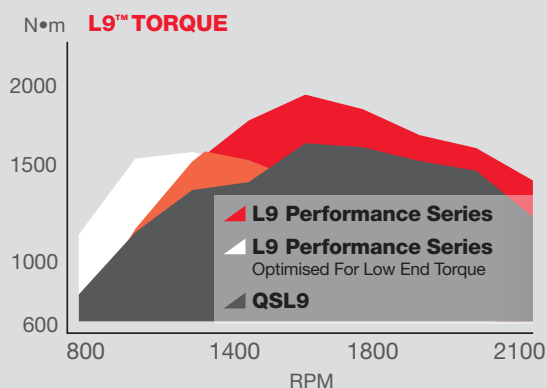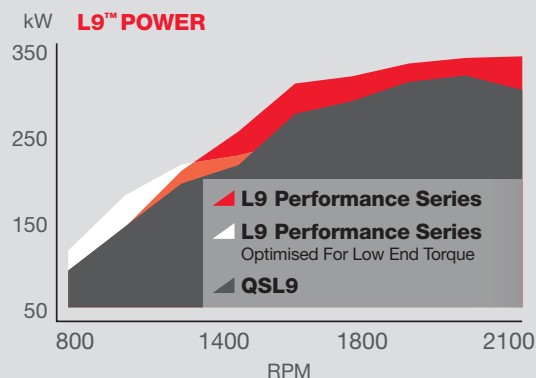

Power kW (HP)	Peak Torque N•m (lb-ft) @ rpm
L9 Power Ratings	
321 (430)	1846 (1361) @ 1500
309 (415)	1795 (1324) @ 1400
298 (400)	1795 (1324) @ 1400
291 (390)	1795 (1324) @ 1400
283 (380)	1795 (1324) @ 1400
272 (365)	1795 (1324) @ 1400
261 (350)	1561 (1151) @ 1400
254 (340)	1526 (1125) @ 1400
252 (338)	1526 (1125) @ 1400
246 (330)	1636 (1207) @ 1100
242 (325)	1526 (1126) @ 1400
231 (310)	1526 (1125) @ 1400
224 (300)	1526 (1125) @ 1100
220 (295)	1472 (1085) @ 1400
213 (285)	1636 (1207) @ 1100
209 (280)	1472 (1085) @ 1400

*Additional ratings may be available; contact your distributor for more information.

MORE SUPPORT

Cummins Care is not a typical call centre. We are a solutions centre helping to prevent issues, provide answers quickly and reimburse accurately. We are your connection to a whole new level of customer service that is Always On to support and deliver faster personal attention with rapid results. From the moment you engage with Cummins Care, you will have access to a Cummins expert with specialised skill sets, experience and in-depth knowledge to take care of your needs.



*5,000 ppm capable when appropriately configured without aftertreatment for suitable regions and applications (Stage II). Emissions regulations vary by region and should be consulted to determine appropriate aftertreatment configuration.



cummins.com

© 2019 Cummins Inc. All rights reserved. Cummins is a registered trademark of Cummins Inc.

Bulletin 5544073 Printed 8/19