

QSF2.8




49-74 hp
37-55 kW

Cummins
Direct Flow™
Air Cleaner



2.8-Liter
4-Cylinder

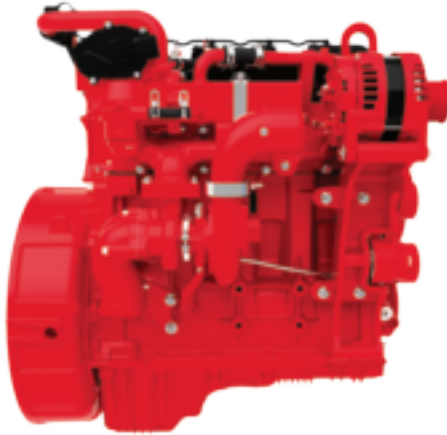

- Excellent power and outstanding performance; capable of 221 lb-ft at max peak torque at its top rating
- Simple, compact installation with no user interface at Tier 4 Final
- Significant weight advantage from composite parts and sculptured cast-iron block
- Global service and support, with a dealer network of over 6,500 distributor and dealer locations in 190 countries
- 24/7/365 support by calling Cummins Care at 1-800-DIESELS™ (1-800-343-7357)

Diesel Oxidation Catalyst (DOC)



- Proven aftertreatment solution to meet EPA Tier 4 Final/EU Stage IIIB regulations
- “Fit and forget” DOC is service-free
- Smaller space claim

Forward To Final.



Power Output	49-74 hp	(37-55 kW)
Peak Torque	221 lb-ft	(300 N•m)
Engine Weight (Wet)	538 lbs	(244 kg)
Aftertreatment Weight	12 lbs	(5.5 kg)
Fuel System	Electronic High Pressure Common Rail (HPCR) Fuel System	
Air Intake	Cummins Direct Flow Air Cleaner	
Turbo	Cummins Wastegate Turbo	
Emissions Control	Exhaust Gas Recirculation + Diesel Oxidation Catalyst (EGR + DOC)	
Electronics	Remote Electronic Control Module (ECM)	
Crankcase Filter	Open Crankcase Ventilation	
Fuel Performance	BSFC Optimized for Industrial Duty Cycles	



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

Phone: 1-800-DIESELS™ (1-800-343-7357)
Fax: 1-800-232-6393
Internet: cumminsengines.com

Twitter.com/CumminsEngines
YouTube.com/CumminsEngines

Bulletin 4087359 Printed in U.S.A. 6/14
©2014 Cummins Inc.